

BOOM REDUCERS

Single-Wall

Features

Our longest lasting single wall reducer. Weld ends having a chrome carbideliner to protect the ends against excessive wear. Reducers are tagged with size, part number, weight (both dry & FWC) and working pressure.

Specifications


Reducer	Heat Treatment	System	Weld Ends
Hardened Steel	Induction Hardened	DN150/125	Steel w/ chrome carbide inserts
Hardness	Working Pressure	Pipe Weight	
Up to 50HRc	85 bar (1233psi)	Varies per length	

Complete System

- Single-Wall Boom Pipe (UltraIII, II and XL-92)
- Cast Manganese Elbows
- Twin-Wall Boom Pipe (UltraIII, II and XL-92)
- Hardened, Cast Steel Backend Kit

Length (in)	Length (mm)	Inlet End (DN150/6)	Outlet End (DN125/5)	Shipping Weight (lbs / Kg)	Part Number
39.38	1000	Schwing Female	148mm	71 / 32	115-11968H
47.25	1200	Hevi-Duty	148mm	84 / 38	115-11436H
47.25	1200	SK	148mm	86 / 39	115-10858H
47.25	1200	Male ZX	148mm	81 / 37	115-11673H
48.81	1240	Schwing Female	148mm	85 / 39	115-09494H
50.75	1290	Schwing Female	148mm	88 / 40	115-14218H
52.37	1330	Schwing Female	148mm	90 / 41	115-09959H
63.00	1600	Schwing Female	148mm	108 / 49	115-11475H
65.00	1651	Schwing Female	148mm	110 / 50	115-13369H
100.00	2540	Schwing Female	148mm	135 / 61	115-10078H
118.12	3000	Schwing Female	148mm	164 / 74	115-09113H

Other lengths and end styles are available upon request. Consult Factory

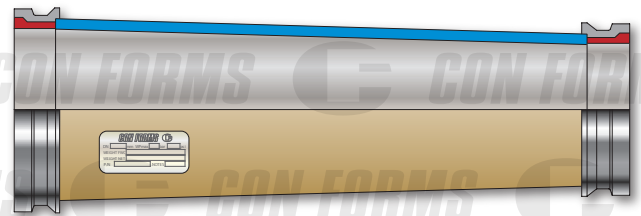

800-223-3676



CONFORMS.COM

