

ULTRA III

Features

Our heat treated single-wall system, utilizing CCI-lined weld ends with cast manganese elbows, backend kits and hardened steel reducers.

Specifications

Heat Treatment

Induction Hardened

System

DN125/5

Wall Thickness

6.6mm/.261"

Hardness

Up to 57HRc

Working Pressure

85 bar (1233psi)

Pipe Weight

14.2 lbs/ft (21.1 kg/m)


FWC Weight

33.5 lbs/ft (49.8 kg/m)

Complete System

- Ultra III Boom Pipe
- Cast Manganese Elbows
- Hardened Steel Reducers
- Hardened, Cast Steel Backend Kit

Ultra III DN125/5 Deck Pipe with 148mm chrome carbide insert (CCI) weld ends			
Length (in)	Length (mm)	Approx. Shipping Weight (lbs / Kg)	Part Number
39.37	1000	49 / 22	B4843937MH
78.75	2000	96 / 44	B4847875MH
118.12	3000	143 / 65	B484B812MH
157.50	4000	189 / 86	B484F750MH
Make up length (consult factory)			B484 _____ MH
Other lengths are available upon request. Consult Factory			

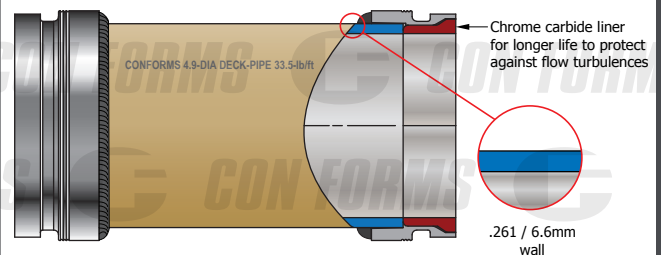

800-223-3676



CONFORMS.COM

