

ULTRA PLUS

Features

Our extended life single-wall system. Ultra Plus deck pipe is hardened through a multiple step heat treating process and offers CCI-lined weld ends.

Specifications

Heat Treatment

Multiple Step Process

System

DN125/5

Wall Thickness

6.6mm/.261"

Hardness

Up to 68HRc

Working Pressure

85 bar (1233psi)

Pipe Weight

14.2 lbs/ft (21.1 kg/m)


FWC Weight

33.5 lbs/ft (49.8 kg/m)

Complete System

- Ultra Plus Boom Pipe
- CCI-Lined Elbows
- CCI-Lined Reducers
- CCI-Lined Backend Kit

Ultra Plus DN125/5 Deck Pipe with 148mm chrome carbide insert (CCI) weld ends			
Length (in)	Length (mm)	Approx. Shipping Weight (lbs / Kg)	Part Number
39.37	1000	49 / 22	BC543937MH
78.75	2000	96 / 44	BC547875MH
118.12	3000	143 / 65	BC54B812MH
157.50	4000	189 / 86	BC54F750MH
Make up length (consult factory)			BC54 ___ MH
Other lengths are available upon request. Consult Factory			

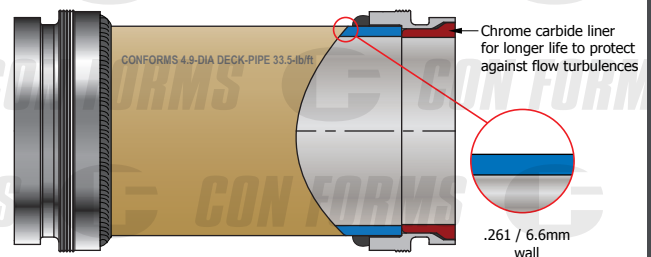

800-223-3676



CONFORMS.COM

