


Discharge HOSE

# FLEX-BOND

CON FORMS




FLEX BOND DISCHARGE HOSE



4 Layers of woven fiber reinforcement

Extruded rubber tube

1/25 TO 2.5/63.5

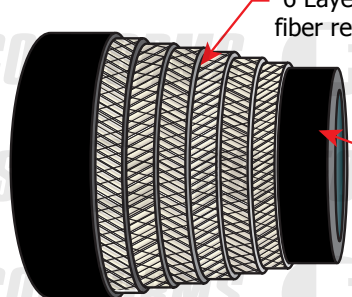

6 Layers of woven fiber reinforcement


Extruded rubber tube

3/76 TO 5/125


Flex-Bond Discharge Hose (FB)					
Size (in / mm)	Mfg. Min. Burst (bar / psi)	Working Pressure (lbs / Kg)	Shipping Weight (lbs / kg) ft	F.W.C. (lbs / kg) ft	Part Number
1½ / 38	165 / 2400	55 / 800	0.9 / .41	2.7 / 1.2	H15FB__C
2 / 51	165 / 2400	55 / 800	1.2 / .54	4.5 / 2.0	H20FB__C
2½ / 63.5	165 / 2400	55 / 800	1.7 / .77	6.8 / 3.1	H25FB__C
3 / 76	138 / 2000	46 / 666	2.5 / 1.1	9.9 / 4.5	H30FB__C
3½ / 89	138 / 2000	46 / 666	2.9 / 1.3	12.9 / 5.9	H35FB__C
4 / 102	138 / 2000	46 / 666	3.3 / 1.5	16.4 / 7.4	H40FB__C

Specify ends and lengths

HOSE END OPTIONS



Hevi-Duty End



Metric End

Other ends are available upon request. Consult factory

800-223-3676



CONFORMS.COM

