


Discharge HOSE

PLASTER & GROUT

CON FORMS  PLASTER & GROUT

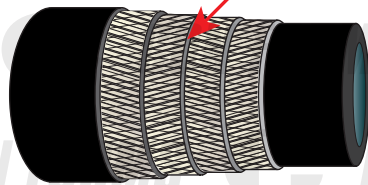

Plaster & Grout Discharge
4 Layers of high
strength synthetic cord
40 Bar working
pressure 3:1 SF

Plaster & Grout Discharge Hose (PG)

Size (in / mm)	Mfg. Min. Burst (bar / psi)	Working Pressure (lbs / Kg)	Shipping Weight (lbs / kg) ft	F.W.C. (lbs / kg) ft	Part Number
1 / 25	120 / 1800	40 / 600	.06 / .27	1.1 / .5	H10PG__C
1½ / 35	120 / 1800	40 / 600	.97 / .44	2.2 / 1.0	H15PG__C
2 / 50	120 / 1800	40 / 600	1.2 / .54	4.3 / 1.9	H20PG__C

Consult factory for available lengths. Hose supplied with European camlock ends.

800-223-3676



CONFORMS.COM

