



Discharge HOSE

SUPER FLEX 1250

SUPER FLEX 1250

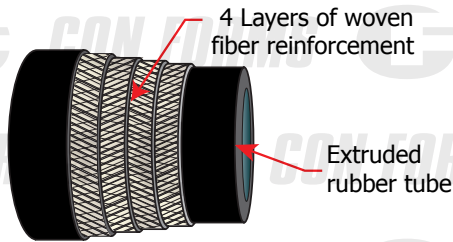

1.25/32 TO 2.5/63.5

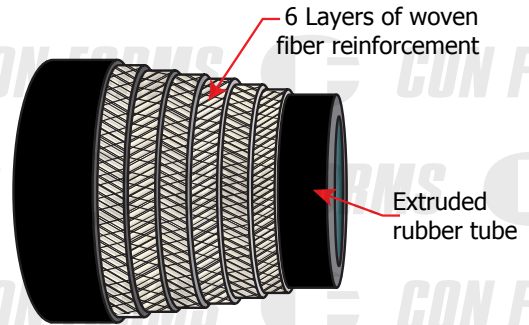


3/76 TO 5/125

Super Flex 1250 Discharge Hose (SF)


Size (in / mm)	Mfg. Min. Burst (bar / psi)	Working Pressure (lbs / Kg)	Shipping Weight (lbs / kg) ft	F.W.C. (lbs / kg) ft	Part Number
1¼ / 32	170 / 2500	85 / 1233	.71 / .32	1.9 / .9	H12SF__C
1½ / 38	170 / 2500	85 / 1233	.97 / .44	2.8 / 1.7	H15SF__C
2 / 51	170 / 2500	85 / 1233	1.5 / .66	4.7 / 2.1	H20SF__C
2¼ / 57.4	170 / 2500	85 / 1233	1.3 / .61	5.5 / 2.5	H22SF__C
2½ / 63.5	170 / 2500	85 / 1233	1.8 / .82	6.9 / 3.1	H25SF__C
3 / 76	170 / 2500	85 / 1233	2.5 / 1.1	9.9 / 4.5	H30SF__C
3½ / 89	170 / 2500	85 / 1233	2.9 / 1.3	12.9 / 5.9	H35SF__C
4 / 102	170 / 2500	85 / 1233	3.2 / 1.5	16.3 / 7.4	H40SF__C
4½ / 114	170 / 2500	85 / 1233	3.8 / 1.7	20.3 / 9.2	H45SF__C
5 / 127	170 / 2500	85 / 1233	4.8 / 1.7	24.2 / 10.9	H50SF__V

Specify ends and lengths

HOSE END OPTIONS



Hevi-Duty End



Metric End

Other ends are available upon request. Consult factory

800-223-3676



CONFORMS.COM

